

Framery 2Q

Product Information



Framery 2Q

The full-size meeting room

Framery 2Q office booth is designed for 4-6 people. It's the best place to co-create, brainstorm and have meetings. Our superior sound insulation system ensures that your meetings won't disturb the office – and the office noise won't disturb you.



Framery 2Q Standard

Have it in your style. You can choose 2Q without furniture, leaving you the option to furnish it the way you like. The superb sound insulation ensures you and your team total sound privacy and the adjustable airflow creates a happy atmosphere to work in.

Options

- $\boldsymbol{\cdot}$ Frame and exterior colors
- $\cdot \ \text{Working height} \\$
 - · Standard 72 cm / 28.3 in
 - · High 90 cm / 35.4 in
- · Table option
- Screen bracket
- · Whiteboard
- Booking System Ready

Interior variations



Framery 2Q Lounge

Living room in your office. Framery 2Q Lounge variation provides a more casual environment for company meetings, a calm space to retreat to during the work-day, or an area for socialization. Custom-designed Clint Sofa, large whiteboard, free-standing Piaggio table and a wall shelf make up for a functional yet relaxed setting.

Options

- · Frame and exterior colors
- · Clint sofa colors
- · Piaggio table

- Screen bracket
- Whiteboard
- · Booking System Ready

Features

Exterior	Painted sheet metal or brushed stainless steel
Glass	Sound control laminated glass
Frame and table	Formica laminate on birch plywood with varnish trim
Solid walls, roof and floor	A sandwich element of sheet metal, birch plywood, recycled acoustic foam and acoustic felt. An anti-static and stain resistant low loop pile carpet for interior floor.
Weight	Without furniture: 950 kg / 2094 lb
Airflow	Total airflow is 121,1 l/s / 436 m ³ /h

Minimum recommended space for the air to circulate is 20 cm / 7.9" above the pod.

Standard: Power cord can be led from the floor and the ceiling. If led from the floor, the cord length is 2.7 m / 106.3 in

Lounge: Power cord can be only led out of the bottom from backside of the pod, the length is $3.5\ m\ /\ 137.8$ in

All electric components can be changed if there is a malfunction.

Framery's products can be plugged into a wall socket. The pods have their own power supplies that give 24 V DC to the lights and 12V DC fans. The lights and fans are operated by a motion detector. Inside the pods, there are country-specific power outlets for charging mobile devices.

Measurements

Exterior	220 cm x 235 cm x 280 cm (height, width, depth) 86.6 in x 92.4 in x 110.4 in (height, width, depth)
Door	Left handed Doorway 86 cm / 33.8 in Clear opening width 82 cm / 32.3 in

Framery 2Q



Power

Power consumption Framery 2Q

42 W while in use

- · LED lights: 24 W
- · Fans in total: 18 W
- 5 W standby power consumption
- Fans are working on 25% of the maximum power

Maximum power consumption:

- · 45 W total
- · LED light ceiling: 27 W
- · Fans in total: 18 W

Outlets

Without table

Petra: 3 power sockets + 2 charging USB sockets

Framery 2Q Standard

With table

Peak: 4 power sockets

+ 2 charging USB sockets + HDMI socket

Both outlet options available for order with LAN

Framery 2Q Lounge

Wall shelf

Pluto: 2 power sockets + 2 charging USB sockets

Clint sofas:

Phase: 4 power sockets, 2 under each Clint sofa

Input and output values

Input:

· 100-240 VAC, 8.0 A, 50-60 Hz

Output VAC (socket):

· 100-240 VAC, 6.6 A, 50-60 Hz

Output USB (TUF) charging:

· Maximum combined output of 5 A at 5 VDC (25 W)



Framery 2Q Standard

Working height options





Standard table

- Table height: 72 cm / 28.3 in
- 4 power sockets + 2 charging USB sockets + HDMI socket
- Optional screen bracket and whiteboard



High table

- · Table height: 90 cm / 35.4 in
- 4 power sockets + 2 charging USB sockets + HDMI socket
- Optional screen bracket and whiteboard

Without table

- · 3 power sockets
 - + 2 charging USB sockets
- Optional screen bracket and whiteboard

Framery 2Q Standard's optional whiteboard is the same as in Lounge, located on the inside wall of the pod.


Screen bracket for Framery 2Q - Standard

Framery 2Q Standard screen bracket is located on the back glass, attached to the power column.

Screen specifications:

• Maximum display size 50" - Recommended size 43" with flat VESA 100 x 100 or 200 x 200 (with adapter) mounting surface.

Screen not included

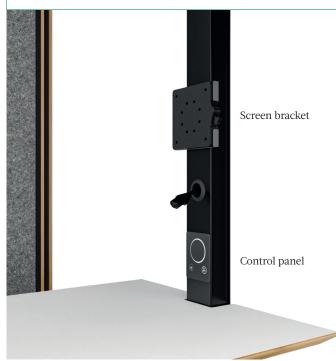

Framery 2Q Lounge





Whiteboard without screen bracket.

Easy-to-remove cork board with magnet attachment.


Screen bracket for Framery 2Q - Lounge

Framery 2Q Lounge screen bracket is located on the center of the Lounge whiteboard.

Screen specifications:

• Recommended size 43" - Maximum weight 30 kg / 66 lbs VESA support: 100 x 100, 100 x 150, 150 x 100, 200 x 100, 100 x 200, 200 x 200, 300 x 200, 400 x 200

Screen not included

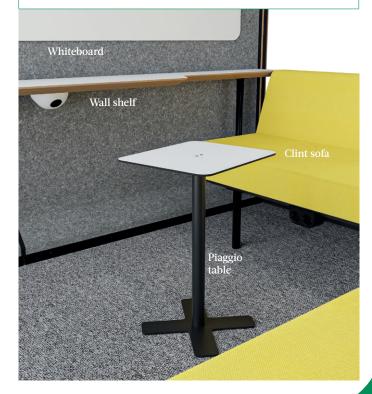

Exterior and frame colors



White

EXTERIOR STANDARD: GLOSSY RAL 9016

ALSO AVAILABLE:

- ULTRAMATT RAL 9016 - WHITEBOARD PAINT SURFACE

FRAME STANDARD: FORMICA K1009 MATT



Lemon

EXTERIOR: ULTRAMATT RAL 1012

FORMICA BASED ON RAL 1012



Upholstery fabrics

CLINT SOFA - STANDARD: STEELCUT TRIO 3 #446



Clint Gray FIORD 2 #151



Black EXTERIOR: ULTRAMATT RAL 9005

FRAME: FORMICA F2253 CR



Misty Blue

EXTERIOR: ULTRAMATT RAL 620-3

FRAME:

FORMICA 1998



Burned Orange DIVINA 3 #542



Forest Green DIVINA 3 #876



Piglet Pink

EXTERIOR: ULTRAMATT RAL 940-6

FRAME. FORMICA BASED ON RAL 409-6



50's Blue

EXTERIOR: ULTRAMATT RAL 6034

FRAME-FORMICA F7879



Piglet Pink DIVINA MD #613



Purple Red DIVINA MD #633



Petrol Blue

EXTERIOR: ULTRAMATT RAL 690-6

FRAME:

FORMICA BASED ON RAL 690-6



Forest Green

EXTERIOR: ULTRAMATT RAL 750-4

FRAME:

FORMICA F7967



50's Blue DIVINA MD #813



Petrol Blue DIVINA MD #843



Purple Red

EXTERIOR: ULTRAMATT RAL 3004

FRAME:

FORMICA F7966



Spring Green EXTERIOR:

ULTRAMATT RAL 230-6

FORMICA BASED ON RAL 230-6

Cloudy Gray DIVINA MD #733



Misty Blue DIVINA MELANGE 2 #731



Burned Orange EXTERIOR: ULTRAMATT RAL 410-5


FRAME: FORMICA F2962



Cloudy Gray EXTERIOR:

ULTRAMATT RAL 850-2

FRAME: FORMICA F0189



Spring Green DIVINA MELANGE 2 #971 Framery's Quality Management System is certified against ISO 9001 and Framery's Environmental Management System is certified against ISO 14001. CE marking is a manufacturer's declaration that a product meets the requirements of relevant EC directives. The EC directives for Framery O, Q and 2Q pods are: Low Voltage Directive (LVD) 2006/95/EC, Electromagnetic Compatibility Directive (EMC) 2004/108/EC, Restriction of Hazardous Substances (RoHS) Directive 2011/65/EU and Ecodesign Directive 2009/125/EC.



Acoustics

We do not give out the results of sound insulation measurements done to our products. The reason for this is that, at the moment, there isn't a uniform way of doing these measurements. If we were to give out these results, they would likely be compared to results measured in another way. This kind of comparison would be misleading. However, we're confident that the sound insulation of our products is the best in the product category.

ISO 23351-1 (https://www.iso.org/standard/75299.html) is a new standard that is in the final phases of ISO's approval process. It will be the first standard that can be used to determine the level of sound insulation of furniture ensembles such as pods, and to produce a single figure, called speech level reduction (Ds), that describes it.

Material safety

We conduct emissions testing for the products every time a major update is planned for Framery products in order to be sure that there aren't any harmful compounds volatilizing from the products such as formaldehydes or VOCs. We want to embrace transparency of the materials we use for our products and thus we have compiled Health Product Declarations ® (HPD) for our products. Our HPDs can be found and downloaded for free online from the Health Product Declaration Collaborative public repository.

Fire safety

No flammable materials are used in Framery products. The fire safety of all surface materials, upholstery and acoustics materials of the products are tested and classified by either national or international standards. EN 13501-1 classification for the used materials is the following: acoustic wool is classified B-s1, d0, acoustic felt B-s2, d0 and carpet Cfl-s1. All surface materials have also been tested against ASTM E84 / UL 723 and are classified at least as Class C. Outer frames with laminated surface are IMO certified (French Maritime Authority). Moulded foam used in Tovi stool seat meets CA TB 117:2013 requirements. Fabric meets the performance requirements of BS EN 1021-1 and 1021-2. According to Inspecta, an EU accredited inspection body, there is no need for installing sprinklers in Framery O, Q or 2Q in Europe.

Framery has conducted extensive fire testing in US for the products and results- suggest that there is no need for installing sprinklers in Framery O, Q and 2Q in North America either. It is still recommended to check the requirements with local AHJ / fire inspector in North America as interpretations may differ.

Sustainability

Framery's products consist mostly of plywood, steel, glass and acoustic materials. Plywood used in Framery products has a sustainable forestry FSC or PEFC certification. Sound dampening panels are made up to 60% and the felt panels are made up to 80% of recycled PET plastic (e.g. Plastic bottles). Significant part of all steel, aluminium and glass is recycled during their manufacturing processes. 3rd Party Certifier has conducted a Life Cycle Assessment (LCA) and compiled Environmental Product Declarations (EPD) for both Framery O and Framery Q.

Certificates









Framery 2Q



For more product information, 3D models and Framery insight on our website:

FRAMERYACOUSTICS.COM